

ISA-RACING GmbH Motorsportzubehör August-Horch-Straße 11, D-56736 Kottenheim Telefon: 02651 - 9625-0 Telefax: 02651 - 9625-10 Mail: info@isa-racing.de



REAR SUBFRAME FRONT BUSH

INSTALLATION GUIDE

Contents (parts per pack):

2x A Bushes 2x B Bushes

2x Aluminum Sleeves 1 x Grease

Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual. It is recommended that:


-all work to be carried out by a licensed technician;

-all safety precautions adhered to;

-wheel alignment to be checked and adjusted as required after any suspension work. All fasteners must be tensioned to manufacturer's torque settings.

Fitting Instructions:

- 1. Remove the rubber bushes from the front mounts of the rear sub frame of the car.
- 2. Clean any dirt or debris from around the bore of the bush mounts.
- 3. Fit 'A' bush from the top and fit 'B' bush from the bottom of the mount Fig A.
- 4. Apply some of the supplied grease in the bore of the bushes and push the Aluminum sleeves into the bore of the bushes Fig A.
- 5. Refit subframe and tension all hardware to manufacturers recommended torque settings.

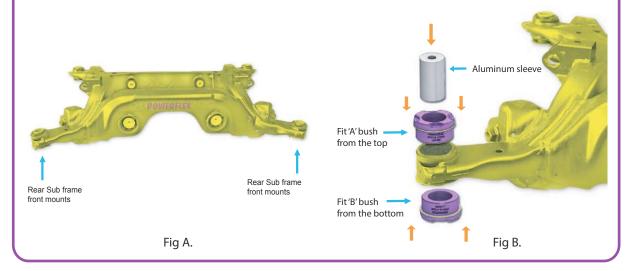

Copyright by Powerflex